

PYROTECHNICS SENSORS



KKA : thermocouple type


Description:

Single and double thermocouple inserted into thermowells (single, gas-tight ceramic) with adjustable mounting bush.

Temperature : „K” 0...1200 °C

„S” 0...1300 °C , „R” 0...1400°C , „B” 0...1800°C

Accessories on request

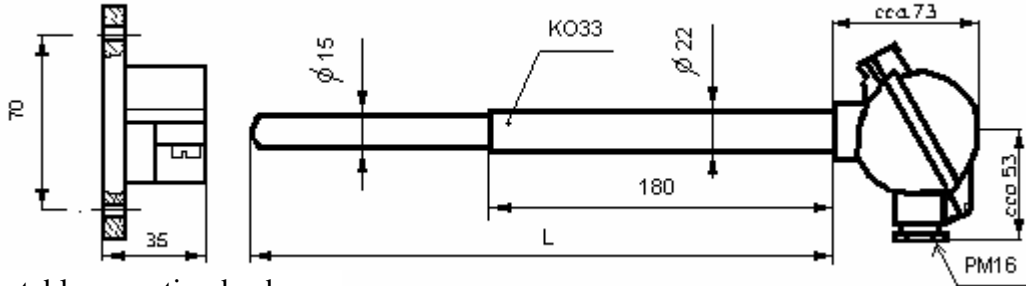

Adjustable mounting bush

Ordering code:

<i>Thermocouple type:</i>	(NiCr-Ni)	K
	(PtRh90/10-Pt)	S
	(PtRh87/13-Pt)	R
	(PtRh70/30-PTRh94/6)	B

<i>Class of tolerance:</i>	(K, S, R)	I.
	(B)	II.

<i>Diameter of thermocouple:</i>	(S, B)	0,5
	(S, R)	0,35
	(K)	3

<i>Construction:</i>	single
	double

<i>Ceramic isolator:</i>	C610
	C799

<i>Outer thermowell:</i>	C610
	C799

Insertion length (L)mm :

<i>Accessories on request:</i>	Not order
	Order

K	K	A							
K									
S									
R									
B									
1									
2									
1									
2									
3									
1									
2									
1									
2									
1									
2									
0									
1									

Naturally, we can differ from the above construction.

Please, fill in the ordering code and send your enquiry (order) to us.

fax: 00-36-1-282-6135 , e-mail: ugyfelsz@rhodium.hu , We will discuss the details.

If you have question, please call: 00-36-1-282-5689 and 00-36-1-282-8308, Our customer service is available.