

# PYROTECHNIC SENSOR





## KEA : thermocouple type

### Description:

Thermocouple inserted into thermowell (metal exterior and C610 gastight ceramic interior) , with adjustable mounting bush.

Temperature : „J” type 0...750 °C , „K” type 0...1100 °C ,

Accessories on request

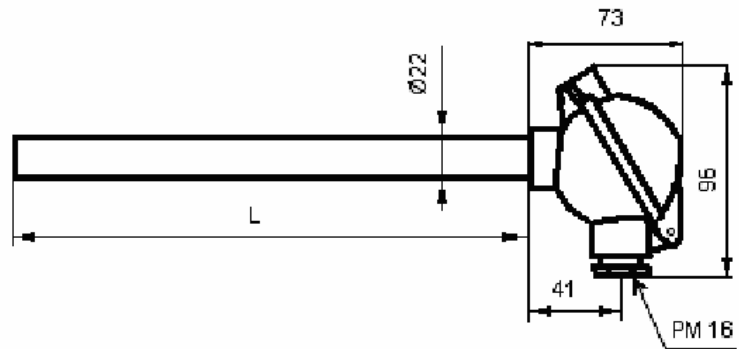

### Ordering code:

K	E	A																		
---	---	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

### MEASURING ELEMENT:

Thermocouple: „J” Fe-CuNi (IEC584)  
 „K” NiCr-Ni (IEC584)  
 Egyéb

Thermocouple accuracy class: I. II.

Diameter of thermocouple-wire (mm):  
 1 3

Thermocouple design: simple double

### THERMOWELL:

Material of thermowell: 1.4301  
 1.4841  
 Egyéb

Diameter of thermowell[mm] : 22  
 Other

Length of insertion (L)mm : 500,710,  
 1000, 1200, 1400, 2000, 2400, Other  
 ( max 2400 mm )

### Accessories on request:

Adjustable mounting bush: Not order  
 Order

J
K
9

1
2

1
3

1
2

1
2
9

1
9

--

0
1

Naturally, we can differ from the above construction.

Please, fill in the ordering code and send your enquiry (order) to us.

fax: 00-36-1-282-6135 , e-mail: [ugyfelsz@rhodium.hu](mailto:ugyfelsz@rhodium.hu) , We will discuss the details.

If you have question, please call: 00-36-1-282-5689 and 00-36-1-282-8308, Our customer service is available.