

SCREW-IN SENSOR




KBC: resistance type

Description:

Resistance temperature sensor with metal thermowell and connection head , with thread (KC1/2"), especially for temperature measuring of fluid and gaseous agents.

Temperature: -200...+600°C, -50...+400°C

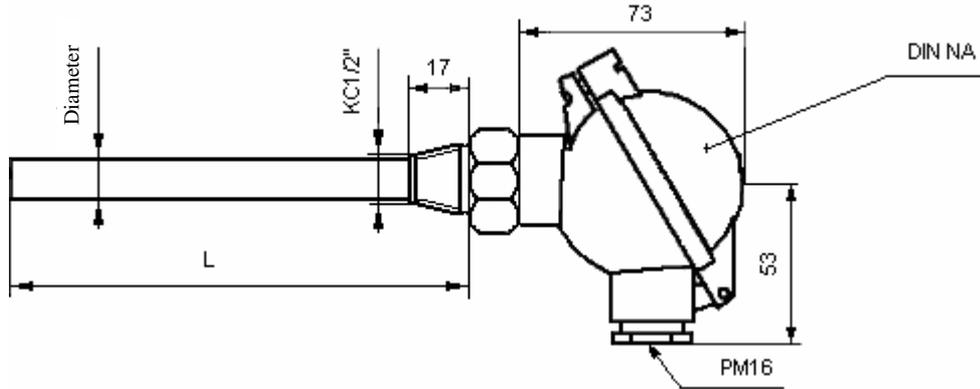

Ordering code:

MEASURING-ELEMENT:

Type of resistance: Pt100
Other

Class of accuracy: A
B
Other

Construction: Simple
Double
Triple

Connecting: 2 wire
3 wire
4 wire

Measuring range: -200...+600° C
-50...+400° C

THERMOWELL, CONNECTION:

Material of thermowell: 1.4301
1.4541
1.4571
Other

Diameter of thermowell [mm]: 10
12
Other

Length of thermowell [mm]:

Head: Non adjustable
Adjustable

ACCESSORIES ON REQUEST:

Head mounted transmitter (4-20 mA):
Not order
Order

| K | B | C | | | | | | | | | | | | | | | | | | |
|-----|---|---|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| 1 | | | | | | | | | | | | | | | | | | | | |
| 9 | | | | | | | | | | | | | | | | | | | | |
| A | | | | | | | | | | | | | | | | | | | | |
| B | | | | | | | | | | | | | | | | | | | | |
| 9 | | | | | | | | | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | | | | | | | | |
| 2 | | | | | | | | | | | | | | | | | | | | |
| 3 | | | | | | | | | | | | | | | | | | | | |
| 2 | | | | | | | | | | | | | | | | | | | | |
| 3 | | | | | | | | | | | | | | | | | | | | |
| 4 | | | | | | | | | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | | | | | | | | |
| 2 | | | | | | | | | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | | | | | | | | |
| 2 | | | | | | | | | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | | | | | | | | |
| 2 | | | | | | | | | | | | | | | | | | | | |
| 3 | | | | | | | | | | | | | | | | | | | | |
| 9 | | | | | | | | | | | | | | | | | | | | |
| 1 0 | | | | | | | | | | | | | | | | | | | | |
| 1 2 | | | | | | | | | | | | | | | | | | | | |
| 9 9 | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | |
| 0 | | | | | | | | | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | | | | | | | | |
| 0 | | | | | | | | | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | | | | | | | | |

Naturally, we can differ from the above construction.

Please, fill in the ordering code and send your enquiry (order) to us.

fax: 00-36-1-282-6135 , e-mail: ugyfelsz@rhodium.hu , We will discuss the details.

If you have question, please call: 00-36-1-282-5689 and 00-36-1-282-8308, Our customer service is available.