PUSH IN SENSOR

NZB H : thermocouple type

Description:

Push in thermocouple sensor.

Temperature: **„J", „L", „K" and „N" type 0…600 °C**

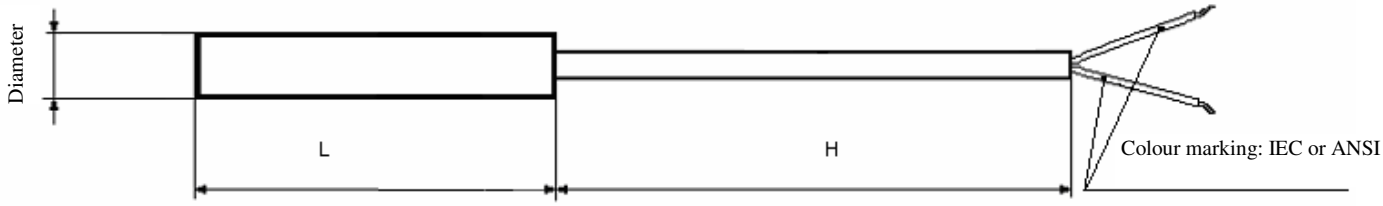

Ordering code:

N	Z	B	H										

MEASURING-ELEMENT:

Type of thermocouple:

„J"Fe-CuNi	*(IEC584)*	**J**
„L"Fe-CuNi	*(DIN 43710)*	**L**
„K"NiCr-Ni	*(IEC584)*	**K**
„N" NiCrSi-NiSi	*(IEC584)*	**N**
Other		**9**

Class of accuracy (IEC584):

I.	**1**
II.	**2**

Construction:

Simple	**1**
Double	**2**

Heat junction:

Ungrounded	**1**
Grounded	**2**

THERMOWELL:

Material of thermowell:

1.4301	**1**
1.4571	**2**
Other	**9**

Diameter of thermowell (mm):

3-10 mm ☐

Length of thermowell (L) mm: ☐

WIRE:

Wire exterior material

PVC	Silicon	Teflon	Fiberglass	Other
105 ºC	*180 ºC*	*250 ºC*	*400 ºC*	
1	**2**	**3**	**4**	**9**

☐

Shield of wire

Non	Exterior	Interior
0	**1**	**2**

☐

Length of wire (H) mm: ☐

Naturally, we can differ from the above construction.

Please, fill in the ordering code and send your enquiry (order) to us.

fax: 00-36-1-282-6135 , e-mail: ugyfelsz@rhodium.hu , We will discuss the details.

If you have question, please call: 00-36-1-282-5689 and 00-36-1-282-8308, Our customer service is available.