

PUSH IN SENSOR




NZF H: thermocouple type

Description:

Push in thermocouple sensor.

Temperature: „J” and „K” type 0...600 °C

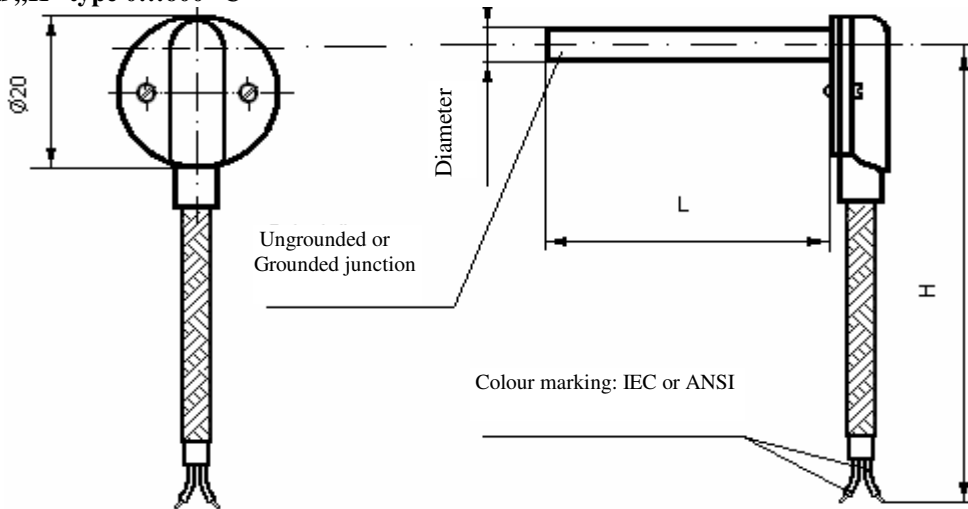

Ordering code:

N	Z	F	H																
---	---	---	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

MEASURING-ELEMENT:

Type of thermocouple:

- „J” Fe-CuNi (IEC584)
- „K” NiCr-Ni (IEC584)
- Other

J
K
9

Class of accuracy (IEC584):

- I.
- II.

1
2

Construction:

- Simple
- Double

1
2

Heat-junction:

- Ungrounded
- Grounded

1
2

THERMOWELL:

Material of thermowell:

- 1.4301
- 1.4541
- 1.4571
- Other

1
2
3
9

Diameter of thermowell [mm]:

- 3
- 4
- 6
- 8

--

Insertion length:

L [mm]

--

WIRE:

Wire exterior material

- | | | | | |
|--------------|------------------|-----------------|---------------------|-------|
| PVC
105°C | Silicon
180°C | Teflon
250°C | Fiberglass
400°C | Other |
| 1 | 2 | 3 | 4 | 9 |

--

Shield of wire

- | | | |
|-----|----------|----------|
| Non | Exterior | Interior |
| 0 | 1 | 2 |

--

Length of wire:

H (mm)

--

Naturally, we can differ from the above construction.

Please, fill in the ordering code and send your enquiry (order) to us.

fax: 00-36-1-282-6135 , e-mail: ugyfelsz@rhodium.hu , We will discuss the details.

If you have question, please call: 00-36-1-282-5689 and 00-36-1-282-8308, Our customer service is available.