SCREW IN SENSORS

NBH V: thermocouple type

Description:

Thermocouple sensor. Thread mounted:C ¼", with steel braiding cable.

Temperature: **„J" and „K" type 0…+600ºC,**

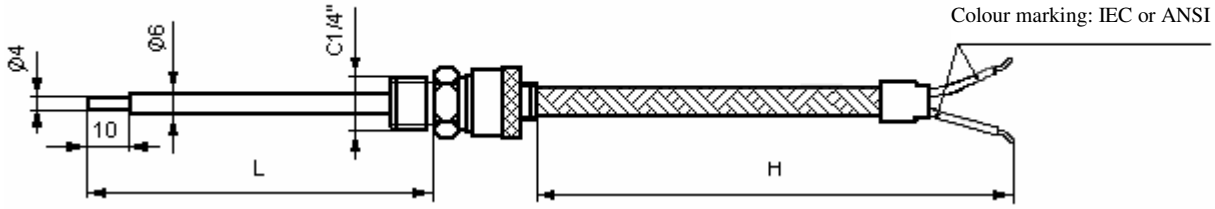

Ordering code:

N	B	H	V						6				

MEASURING-ELEMENT:

Thermocouple type:
*„**J**"Fe-CuNi 0-750 ºC (IEC584)* — 1
*„**K**"NiCr-Ni 0-1100 ºC (IEC584)* — 2
Other — 9

Class of accuracy: (IEC584): *I.* — 1; *II.* — 2

Construction: *Single* — 2; *Double* — 3; *Triple* — 4

Heat-junction: *Ungrounded* — 1; *Grounded* — 2

THERMOWELL:

Material of thermowell: *1.4301* — 1; *1.4541* — 2; *1.4571* — 3; *Other* — 9

Diameter of thermowell [mm]: *6* — 6

*Length of thermowell: **L** [mm]:* [ ]

WIRE:

Wire exterior material

PVC 105ºC	Silicon *180 ºC*	Teflon *250 ºC*	Fibergl. *400 ºC*	Other
1	**2**	**3**	**4**	**9**

Shield of wire

Non	Ext.	Int.
0	**1**	**2**

Length of wire:
H (mm) [ ]

Naturally, we can differ from the above construction.

Please, fill in the ordering code and send your enquiry (order) to us.
fax: 00-36-1-282-6135 , e-mail: ugyfelsz@rhodium.hu , We will discuss the details.
If you have question, please call: 00-36-1-282-5689 and 00-36-1-282-8308, Our customer service is available.