SENSORS OF HOT PLACES







FZA resistance type

Description:

Resistance temperature sensor with metal thermowell, compression fitting. Connection head: machined.

Temperature: -200...+600°C, -50...+400°C

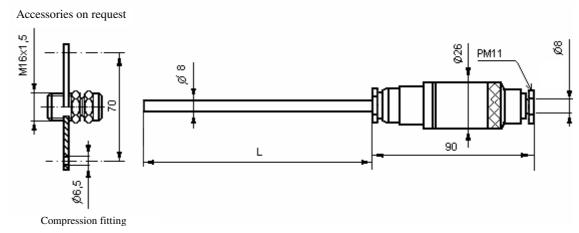

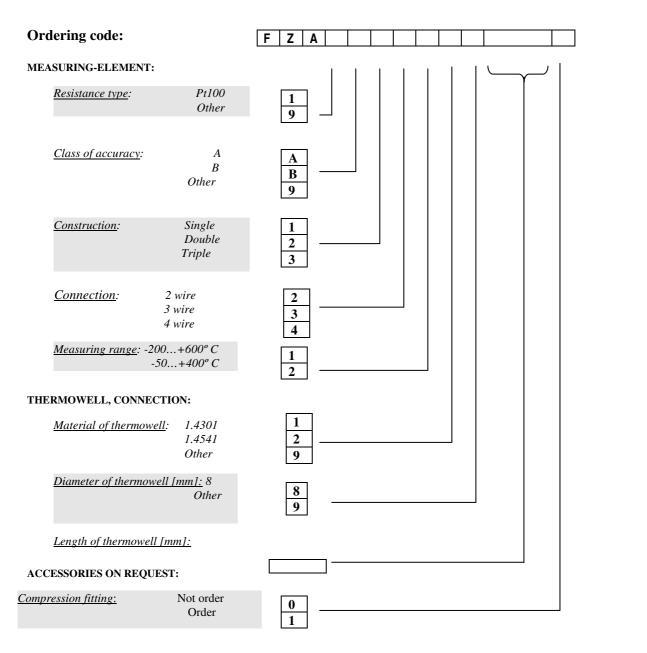

Naturally, we can differ from the above construction.